

Ceiling Square Diffuser - 3 Cone Fixed air pattern

Material: Stamped heavy gauge steel.
Finish: Powder paint coating - white.
Air Pattern: Fixed horizontal 360° diffusion.
Safety: Seismic tabs.
Mounting: Surface or Lay-in T-bar ceiling.
Core Removal: Unlock hanger brackets by swiveling lever down. Holding cone L at opposite sides, push upwards, then turn clockwise and drop core free from back plenum.





CLD3

Optional fiberglass insulation on back panel, complies with A.S.T.M. E84 flame and smoke test. (Available only on models with 24" x 24" face)

☐ -R4

☐ -R6

Round collar up to 14".
Standard height is 1 1/8".
For 2" collar, see CLD3D

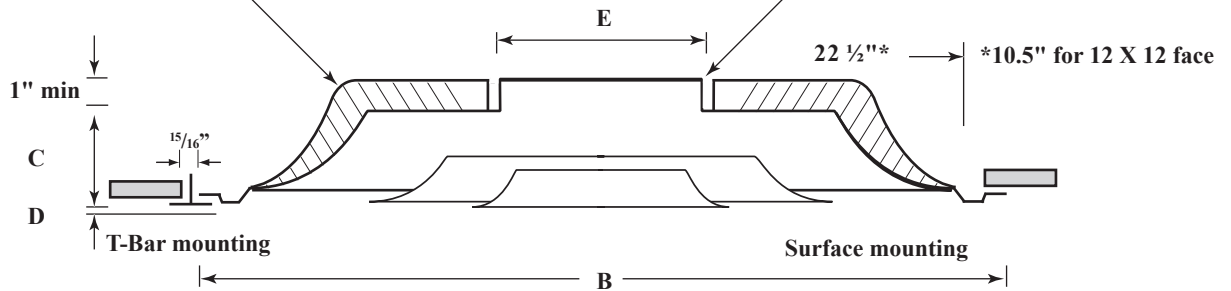

Round Collar Baffles

W1 1 Way	WC 2 Way Corner	WO 2 Way Opposed	W3 3 Way	W4 4 Way (default)

Panel Option for T-bar lay-in Ceiling

W	H	Steel (WxH)	Aluminum (WxH)
		☐ -X2412	☐ -Y2412
		☐ -X2424	☐ -Y2424
		☐ -X2448	☐ -Y2448
		☐ -X4824	☐ -Y4824
		☐ -X2020	☐ -Y2020

No fastening options available


✓	Model #	Duct Size	E	Face Dim B x B	C	D
	CLD3 1206	6	5 7/8"	11 3/4" x 11 3/4"	1 3/4"	7/16"
	CLD3 1208	8	7 7/8"	11 3/4" x 11 3/4"	1 3/4"	7/16"
	CLD3 2406	6	5 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	CLD3 2408	8	7 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	CLD3 2410	10	9 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	CLD3 2412	12	11 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	CLD3 2414	14	13 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"

Finish


☐ /W ☐ Custom (Please Specify)
 White (Default)




Equalizing Grid (Option)



Damper (Option)



Plaster Frame (Option)



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____