

Ceiling Square Diffuser - 4 Cone Fixed air pattern

Material: Stamped heavy gauge steel.
Finish: Powder paint coating - white.
Air Pattern: Fixed horizontal 360° diffusion.
Safety: Seismic tabs.
Mounting: Surface or Lay-in T-bar ceiling.
 Unlock hanger brackets by swiveling lever down. Holding cone L at opposite sides, push upwards, then turn clockwise and drop core free from back plenum.



CLD4


Optional fiberglass insulation on back panel, complies with A.S.T.M. E84 flame and smoke test. (Available only on models with 24" x 24" face)

☐ -R4

☐ -R6


Round collar up to 14".
Standard height is 1 1/8".

For 2" collar, see CLD4D

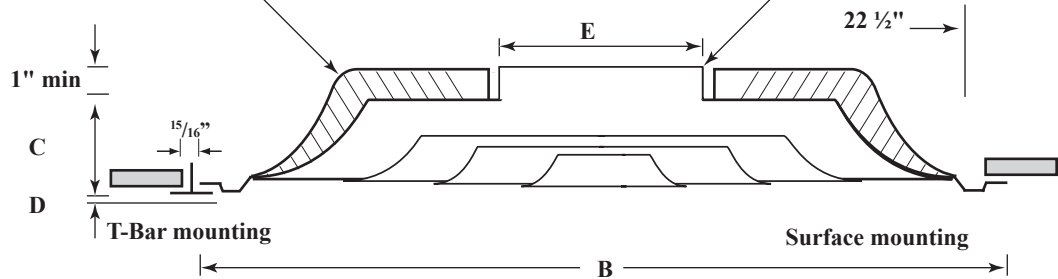

Mounting

☐ -NT Narrow T-bar



Round Collar Baffles

☐ W1 1 Way



☐ WC 2 Way Corner



☐ WO 2 Way Opposed




☐ W3 3 Way



☐ W4 4 Way (default)



Panel Option for T-bar lay-in Ceiling

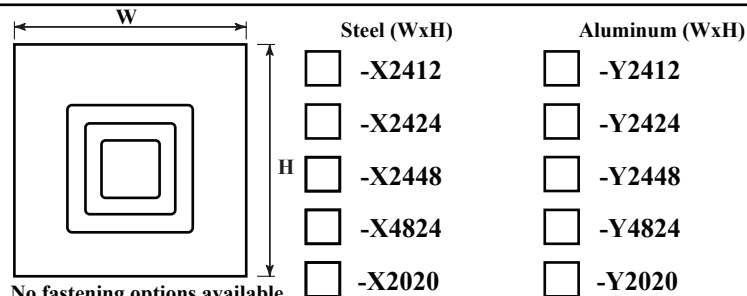

✓	Model #	Duct Size	E	Face Dim B x B	C	D
	CLD4 2406	6	5 7/8"	23 3/4" x 23 3/4"	2 5/16"	1 3/8"
	CLD4 2408	8	7 7/8"	23 3/4" x 23 3/4"	2 5/16"	1 3/8"
	CLD4 2410	10	9 7/8"	23 3/4" x 23 3/4"	2 5/16"	1 3/8"
	CLD4 2412	12	11 7/8"	23 3/4" x 23 3/4"	2 5/16"	1 3/8"
	CLD4 2414	14	11 7/8"	23 3/4" x 23 3/4"	2 5/16"	1 3/8"


Finish

☐ /W White (Default) ☐ /C Custom (Please Specify)



Equalizing Grid (Option)

Refer to NEG




Damper (Option)

Refer to APN4



Opposed Blade

Refer to APN5



Sliding Blade

Plaster Frame (Option)

Refer to DF



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____