


Egg Crate Return Grille for Surface Mount

Material: All aluminium construction.

Mounting: Drywall or any surface mounting.


Countersunk mounting holes on frame.

Grid core: Aluminum $\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ ".



☐ ERA (without OBD damper)

☐ ERA7 (with OBD damper)

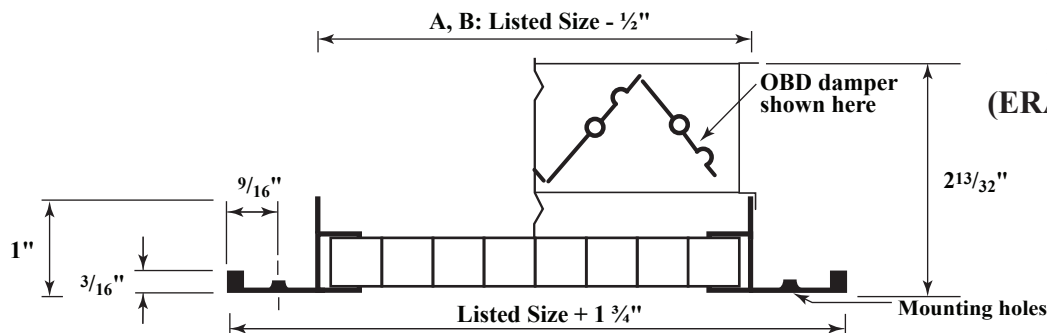


ERA / ERA7
(ERA 2424 shown here)

Size limits	Width A		Height B	
	in	mm	in	mm
Minimum	4	102	4	102
Maximum	48	1219	48	1219

#7 STEEL DAMPER FURNISHED ON LISTED WIDTHS OF 4" AND OVER (for 1" increments only)

#9 STEEL DAMPER FURNISHED ON LISTED WIDTHS UNDER 4"

Options				
☐ -GK	☐ -GN	☐ -GR		
Flange Gasket	Neck Gasket	Rear Gasket		
☐ -SF	☐ -DS	☐ -IS	☐ -HB	☐ -FB
Supplied w/ sub frame	Debris (Bird) Screen	Insect Screen	Hemmed bracket	Fixed Blades 0 degrees



Finish				
☐ /W	☐ /B	☐ /M	☐ /L	☐ /C Custom (Please Specify)
White (default)	Brushed Aluminium	Mill Finish	Brushed and Lacquered	

Panel Option for T-bar lay-in Ceiling

	Steel (WxH)		Aluminum (WxH)	
	W	H	W	H
☐ -X1212			☐ -Y1212	
☐ -X1224			☐ -Y1224	
☐ -X2412			☐ -Y2412	
☐ -X2424			☐ -Y2424	
☐ -X2448			☐ -Y2448	
☐ -X4824			☐ -Y4824	
☐ -X2020			☐ -Y2020	

No fastening options available

Fastening Method

☐ -1 No Fastening	☐ -2 Spring clip	☐ -3 Screw holes (Standard)	☐ -4 Concealed See -HB option	☐ -6 Adhesive tape
---	--	---	--	--

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____