

LBG Architectural Linear Bar Grille


Material: Extruded aluminum.

Lengths over 72 inches supplied as multiple sections.



Opposed Blade Damper (optional):

Galvanized steel construction.

Key-operated through grille face.

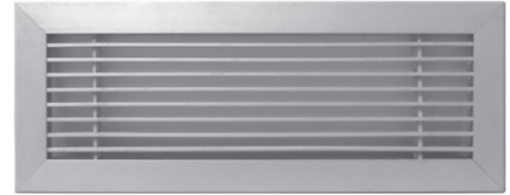

LBG10 / LBG17

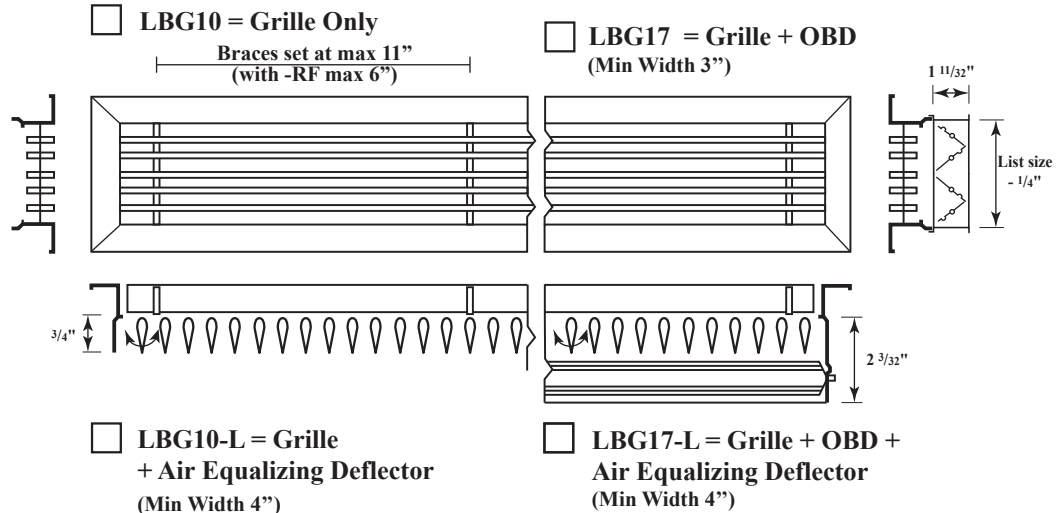


Margin Style			
-A N/A with -3, -4, -5, -RM, -SB	-B N/A with -5, -SB, -RM	-E N/A with -5, -SB, -RM	-F ONLY with -1, -3, -5, -RM
-G ONLY with -1, -5, -RM, -SB	-R N/A with -5, -SB, -RM	-T N/A with -2, -3, -5, -SB, -RM	-P Plaster-In Frame ONLY with -1, -5, -RM

Fastening Method	
-1 No Fastening N/A with -RM	-2 Spring clip N/A with -F, -G, -P, -T
-3 Screw N/A with -A, -G, -T	-4 Concealed N/A with -A, -F, -G, -P Min Width 4"
-5 Core spring clips Only with combined -RM and frames -F, -G, -P	

Finish					
☐ /W White (Default)	☐ /M Mill Finish	☐ /A Anodized	☐ /B Brushed Aluminum N/A with -G, -R	☐ /L Brushed & Lacquered N/A with -G, -R	☐ /C Custom (Please Specify)



- ☐ Security Ceiling Wire -CW
- ☐ Mounting Brackets for Sheetrock -SB
(3/4" from the face) Only w/ -A -G
- ☐ Reinforced Floor Application -RF
(6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ Removable Core Application -RM
(For ceiling add -5, -CW ; for wall add -5)
- ☐ Frame Gasket -GK
- ☐ Vertical Bars -V



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____