

LBG Architectural Linear Bar Grille


Material: Extruded aluminum.

Lengths over 72 inches supplied as multiple sections.



Opposed Blade Damper (optional):

Galvanized steel construction.

Key-operated through grille face.

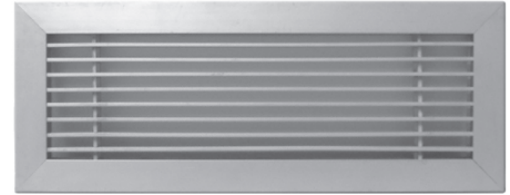

LBG30 / LBG37

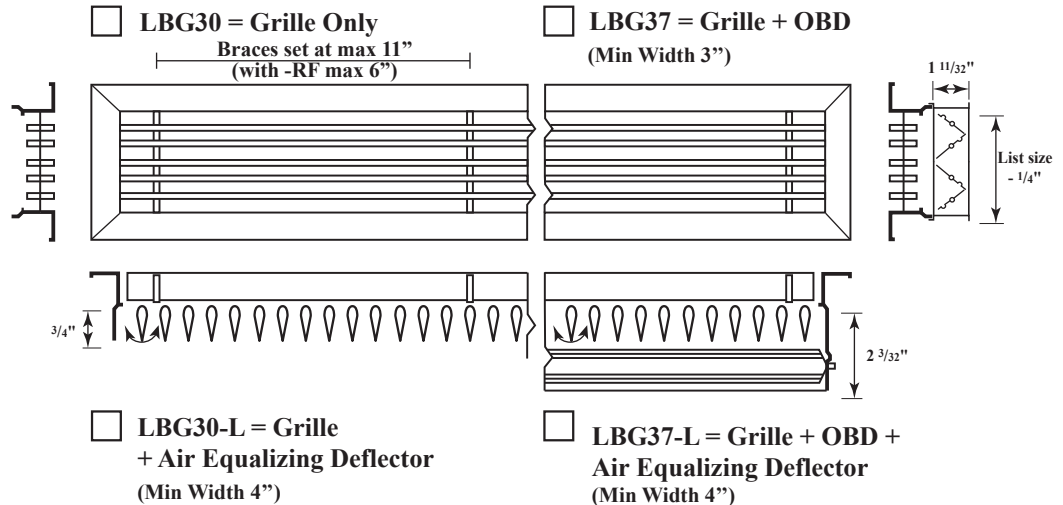


Margin Style			
-A Listed + 9/32" 9/16" Listed - 1/4" N/A with -3, -4, -5, -RM, -SB	-B Listed + 7/8" 7/8" Listed - 1/4" N/A with -5, -SB, -RM	-E Listed + 1 1/4" 1 1/16" Listed - 1/4" N/A with -5, -SB, -RM	-F Listed + 1 3/8" 1" Listed - 1/4" ONLY with -1, -3, -5, -RM
-G Listed - 1/4" 3/16" Listed - 1/4" ONLY with -1, -5, -RM, -SB	-R Listed + 1 1/4" 1 1/16" Listed - 1/4" N/A with -5, -SB, -RM	-T Listed - 1/4" 1 1/16" Listed - 1 3/4" N/A with -2, -3, -5, -SB, -RM	-P Plaster-In Frame Listed + 1 1/4" Plaster Gyproc Listed - 1/4" ONLY with -1, -5, -RM

Fastening Method	
-1 No Fastening N/A with -RM	-2 Spring clip N/A with -F, -G, -P, -T
-3 Screw N/A with -A, -G, -T	-4 Concealed N/A with -F, -G, -P Min Width 4"
-5 Core spring clips Only with combined -RM and frames -F, -G, -P	

Finish					
/W White (Default)	/M Mill Finish	/A Anodized	/B Brushed Aluminum N/A with -G, -R	/L Brushed & Lacquered N/A with -G, -R	/C Custom (Please Specify)



- ☐ Security Ceiling Wire -CW
- ☐ Mounting Brackets for Sheetrock -SB (3/4" from the face) Only w/ -A -G
- ☐ Reinforced Floor Application -RF (6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ Removable Core Application -RM (For ceiling add -5, -CW ; for wall add -5)
- ☐ Frame Gasket -GK
- ☐ Vertical Bars -V



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____