

LBG Architectural Linear Bar Grille


Material: Extruded aluminum.

Lengths over 72 inches supplied as multiple sections.



Opposed Blade Damper (optional):

Galvanized steel construction.

Key-operated through grille face.

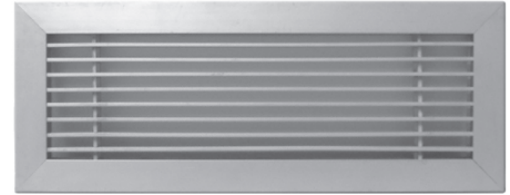

LBG40 / LBG47

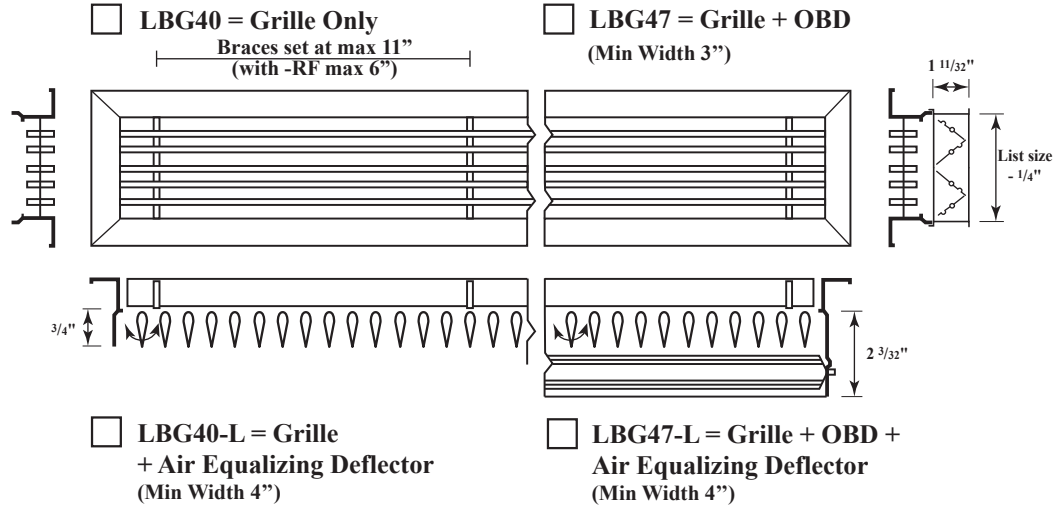


Margin Style			
☐ -A Listed + 9/32" 9/16" → Listed - 1/4" → N/A with -3, -4, -5, -RM, -SB	☐ -B Listed + 7/8" → 7/8" → Listed - 1/4" → N/A with -5, -SB, -RM	☐ -E Listed + 1 1/4" → 1 1/16" → Listed - 1/4" → N/A with -5, -SB, -RM	☐ -F Listed + 1 3/8" → 1" → Listed - 1/4" → ONLY with -1, -3, -5, -RM
☐ -G Listed - 1/4" → 3/16" → Listed - 1/4" → ONLY with -1, -5, -RM, -SB	☐ -R Listed + 1 1/4" → 1 1/16" → Listed - 1/4" → N/A with -5, -SB, -RM	☐ -T Listed - 1/4" → 1 1/16" → Listed - 1 3/4" → N/A with -2, -3, -5, -SB, -RM	☐ -P Plaster-In Frame Listed + 1 1/4" → Plaster Gyproc Listed - 1/4" → ONLY with -1, -5, -RM

Fastening Method	
☐ -1 No Fastening N/A with -RM	☐ -2 Spring clip N/A with -F, -G, -P, -T
☐ -3 Screw N/A with -A, -G, -T	☐ -4 Concealed N/A with -F, -G, -P Min Width 4"
☐ -5 Core spring clips Only with combined -RM and frames -F, -G, -P	

Finish					
☐ /W White (Default)	☐ /M Mill Finish	☐ /A Anodized	☐ /B Brushed Aluminum N/A with -G, -R	☐ /L Brushed & Lacquered N/A with -G, -R	☐ /C Custom (Please Specify)



- ☐ Security Ceiling Wire -CW
- ☐ Mounting Brackets for Sheetrock -SB
(3/4" from the face) Only w/ -A -G
- ☐ Reinforced Floor Application -RF
(6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ Removable Core Application -RM
(For ceiling add -5, -CW ; for wall add -5)
- ☐ Frame Gasket -GK
- ☐ Vertical Bars -V



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____