

LGB Architectural Linear Bar Grille

Material: Extruded aluminum.


Lengths over 72 inches supplied as multiple sections.

Opposed Blade Damper (optional):




Galvanized steel construction.

Key-operated through grille face.

Braces set at max 11"
(with -RF max 6")

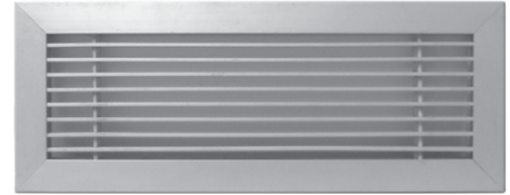

LGB80 / LBG87

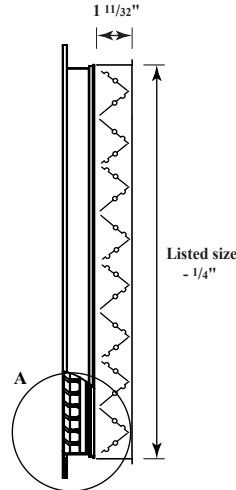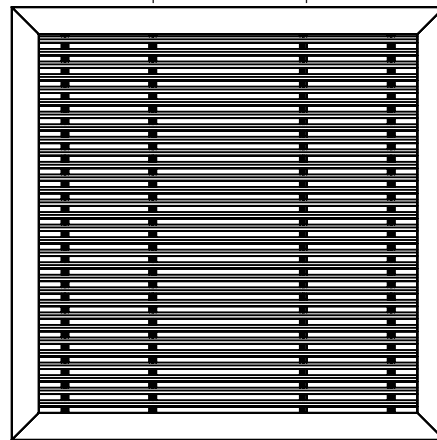

☐ LGB80 = Grille Only

☐ LGB87 = Grille + OBD
(Min Width 3")

☐ LGB80-L = Grille
+ Air Equalizing Deflector
(Min Width 4")

☐ ALB87-L = Grille + OBD +
Air Equalizing Deflector
(Min Width 4")


Margin Style			
-A 	-B 	-E 	-F
-G 	-R 	-T 	-P Plaster-In Frame

Fastening Method	
-1 No Fastening 	-2 Spring clip
-3 Screw 	-4 Concealed
-5 Core spring clips 	

Finish					
☐ /W White (Default)	☐ /M Mill Finish	☐ /A Anodized	☐ /B Brushed Aluminum N/A with -G, -R	☐ /L Brushed & Lacquered N/A with -G, -R	☐ /C Custom (Please Specify)



- ☐ Security Ceiling Wire -CW
- ☐ Mounting Brackets for Sheetrock -SB
(3/4" from the face) Only w/ -A -G
- ☐ Reinforced Floor Application -RF
(6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ Removable Core Application -RM
(For ceiling add -5, -CW ; for wall add -5)
- ☐ Frame Gasket -GK
- ☐ Vertical Bars -V



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____