


Linear Flow Bar Diffuser - 2 Slot


Material: Extruded aluminum construction
Mounting: Surface or Lay-in T-bar ceiling.
 Plaster-in Frame (Tape & Spackle)



LFB20 / LFB27 / LFB28 (LFB27 shown here)

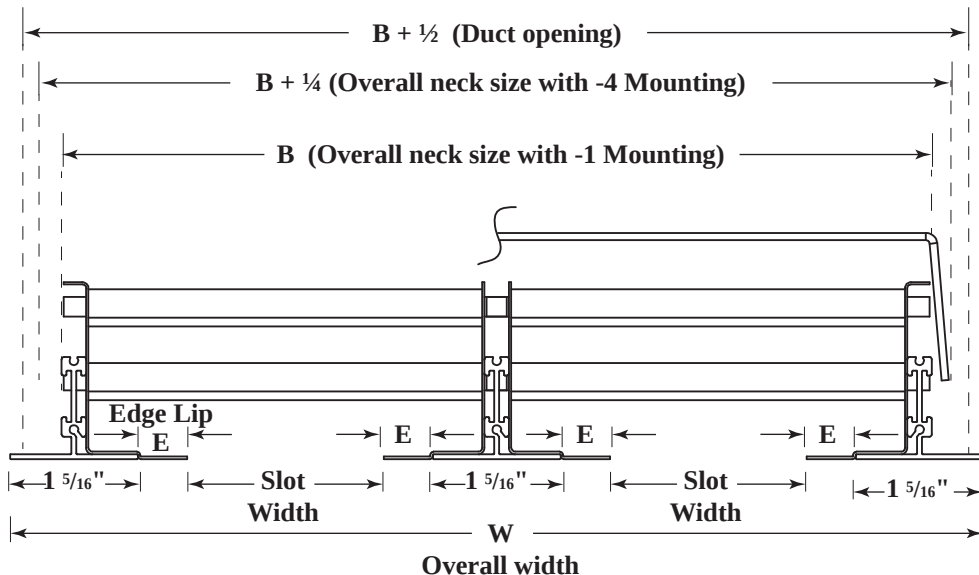

Surface mounting (-E and -P options)

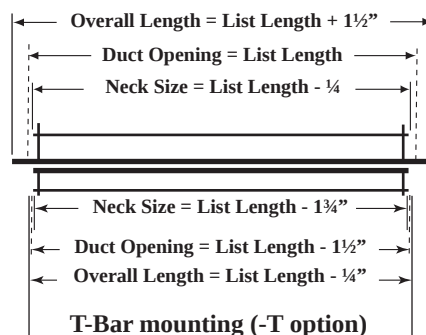

LFB20
without pattern-control damper



LFB27
with high-flow slider



LFB28
with jet-flow baffles

Mounting		
☐ -P Plaster-In Frame	☐ -E Surface Mounting	☐ -T T-Bar mounting
Gypboard Plaster (Tape & Spackle)		
Fastening Method		
☐ -1 No Fastening	☐ -3 Mounting Hole	☐ -4 Concealed
	Only with -E	5/8"

Option LS	
Optional Return Hool/Light Shield Model	
☐ -LS	
Finish	
☐ /W White (Default)	☐ /C Custom (Please Specify)



✓	Slot Width	B	W	C	E	H
	1"	4 7/8"	5 15/16"	1 1/2"	0"	2 1/4"
	1 1/2"	6 7/8"	7 15/16"	1 1/2"	1/4"	3 1/4"
	2"	8 7/8"	9 15/16"	1 3/4"	1/2"	4 1/4"
	2 1/2"	10 7/8"	11 15/16"	1 3/4"	3/4"	5 1/4"
	3"	12 7/8"	13 15/16"	1 3/4"	1"	6 1/4"

Schedule type: _____
 Job: _____
 Architect: _____
 Engineer: _____
 Contractor: _____