

Square Plaque Diffuser - Architectural Line

Material: Stamped heavy gauge steel.
Finish: Powder paint coating - white.
Mounting: Surface or Lay-in T-bar ceiling.
Air Pattern: Fixed horizontal 360° diffusion.
Safety: Seismic tabs.
Core Removal: Unlock hanger brackets by swiveling lever down. Holding core panel at opposite sides, push upwards, then turn clockwise and drop core free from back plenum.




PLD

Optional fiberglass insulation on back panel, complies with A.S.T.M. E84 flame and smoke test. (Available only on models with 24" x 24" face)


☐ -R4

☐ -R6


Round collar up to 14".
Standard height is 1 1/8".
For 2" collar, see PLDD

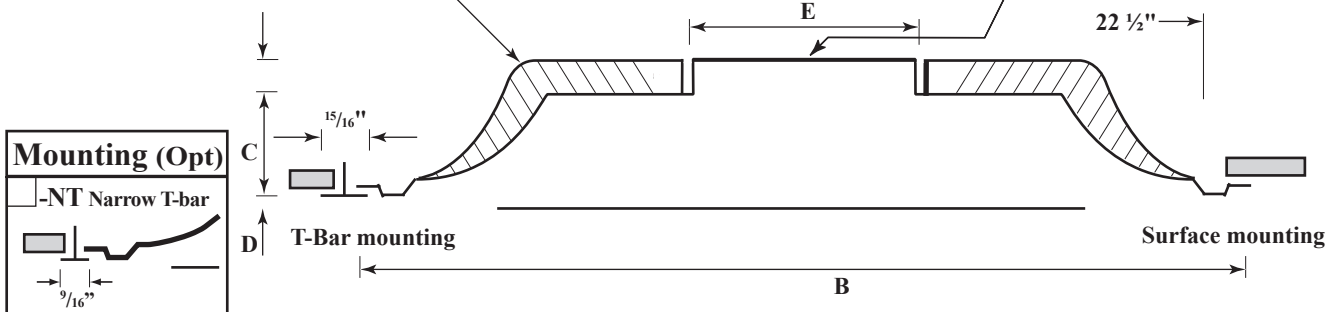


Mounting (Opt)



Round Collar Baffles

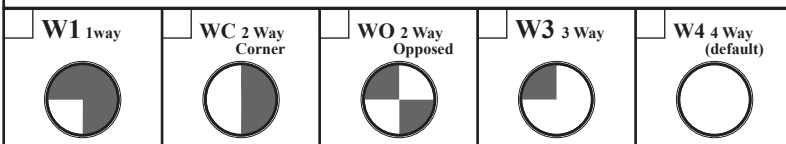

Panel Option for T-bar lay-in Ceiling

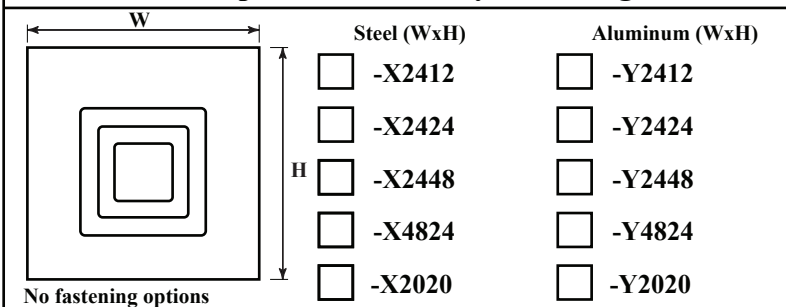


✓	Model #	Duct Size	E	Face Dim B x B	C	D
	PLD 1206	6	5 7/8"	11 3/4" x 11 3/4"	1 3/4"	7/16"
	PLD 1208	8	7 7/8"	11 3/4" x 11 3/4"	1 3/4"	7/16"
	PLD 2406	6	5 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	PLD 2408	8	7 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	PLD 2410	10	9 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	PLD 2412	12	11 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"
	PLD 2414	14	13 7/8"	23 3/4" x 23 3/4"	2 7/8"	7/8"

Finish


☐ /W White (Default) ☐ /C Custom (Please Specify)




Equalizing Grid (Option)



Damper (Option)



Plaster Frame (Option)



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____